





TECNIOUS

SUONCET

www.tecnious.com info@tecnious.com

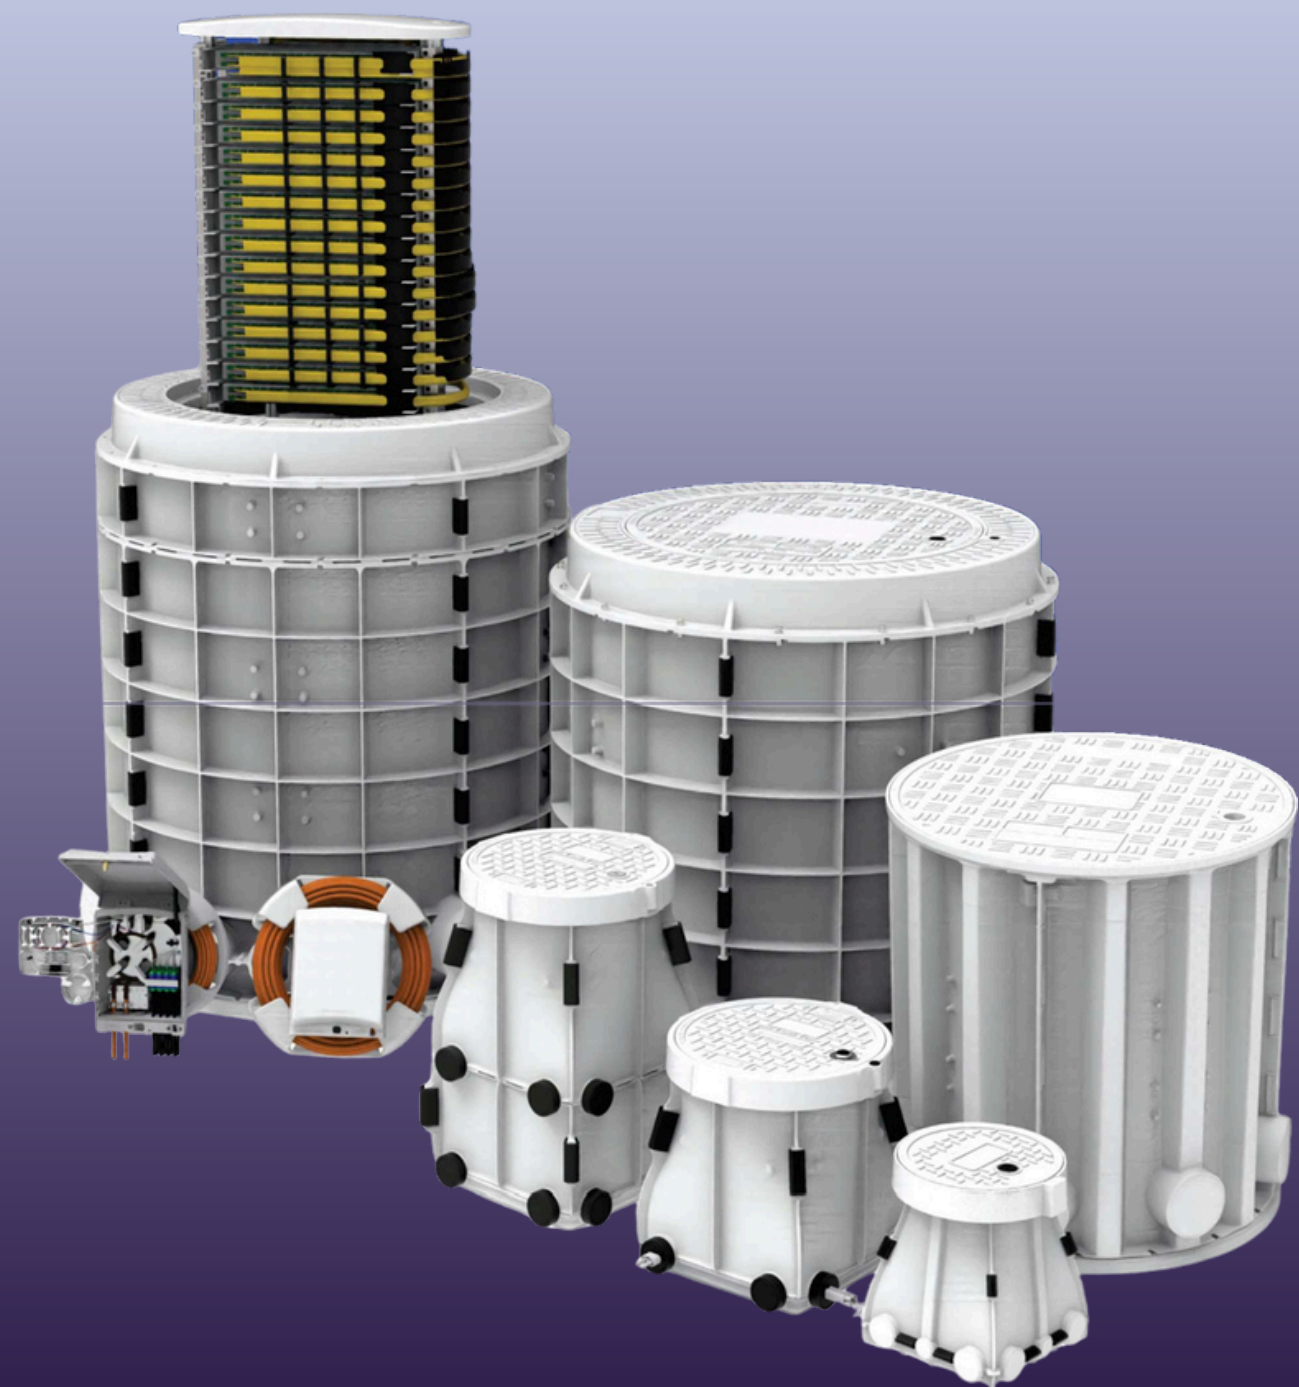

Smartlock es un líder global en el desarrollo y la fabricación de soluciones electrónicas de gestión y monitoreo de accesos, así como de productos relacionados en aplicaciones especializadas para diversas industrias. Nuestro éxito se atribuye a las soluciones únicas y al portafolio de productos que ofrecemos, así como a nuestras capacidades “llave en mano” en la implementación y puesta en marcha exitosa de estas soluciones.

Cámaras de Acceso

RHINODE-1000




DAYLIGHT OPENING
25.6"

WEIGHT
216LB

DEPTH
39.37"

LOAD RATING
ANSI/SCTE 77 - TIER 22

RHINODE COMPACT-600

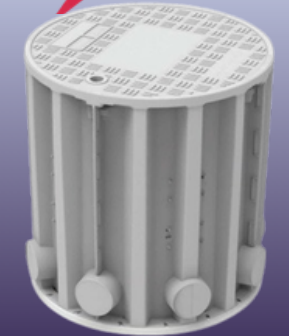


DAYLIGHT OPENING
23.62"

WEIGHT
70.55LB

DEPTH
26.97"

LOAD RATING
ANSI/SCTE 77 - TIER 15

RHINODE-400

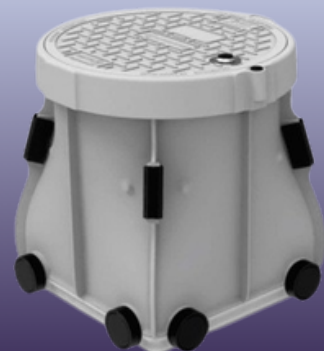

DAYLIGHT OPENING
12.2"

WEIGHT
17.7LB

DEPTH
15.75"

LOAD RATING
ANSI/SCTE 77 - TIER 8

RHINODE-400 (EXTENDED)



DAYLIGHT OPENING
12.2"

WEIGHT
23LB

DEPTH
23.76"

LOAD RATING
ANSI/SCTE 77 - TIER 8

RHINODE-300




DAYLIGHT OPENING
7.87"

WEIGHT
9.92LB

DEPTH
39.37"

LOAD RATING
ANSI/SCTE 77 - TIER 8

RHINODE-DUDC

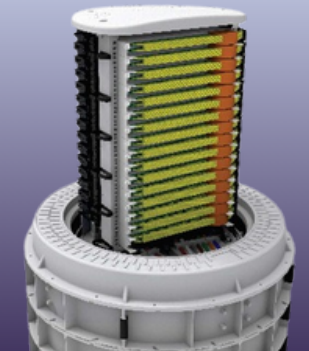

IP RATING
IP68


LOAD RATING
ANSI/SCTE 77 - TIER 22

WORKABLE RACK SPACE
15U-19"
22U-19"

Terminación de fibra



RHINODE SPLICE BOX

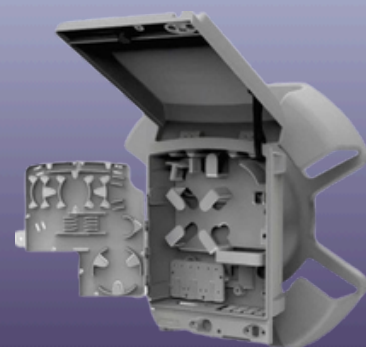

DIMENSIONS
9.7" X 7.3" X 3.5"

REEL SLACK CAPACITY
39FT

MATERIAL
SMC, ABS PLASTIC

FIBER CAPACITY
SPLICE HOLDERS 8-WAY
16X PRE-TERMINATED DROP CABLES
1X8 SPLITTER
8X LC DUPLEX/SC DUPLEX PATCH CABLES

RHINODE-WDC

DIMENSIONS
27.6" X 20" X 14.4"

RACK CAPACITY
9U-19"

WEIGHT
55LB

RATINGS
IP65

MATERIAL
SMC



Llaves inteligentes



GSM ELECTRONIC SMART KEY



DIMENSIONS
8.4" X 3" X 1.1"

POWER SOURCE
2Ah LITHIUM-ION BATTERY

BODY MATERIAL
PLASTIC

RATINGS
SPLASH PROOF
IEC 60068-2

BLUE TOOTH SMART KEY

DIMENSIONS
4.4" X 2.52" X 1.02"

POWER SOURCE
1.5Ah LITHIUM-ION BATTERY

BODY MATERIAL
ABS PLASTIC

RATINGS
SPLASH PROOF
IEC 60068-2




CHAMBER MECHANICAL KEY



MATERIAL
304 STAINLESS STEEL

ECCENTRIC MECHANICAL KEY

MATERIAL
304 STAINLESS STEEL

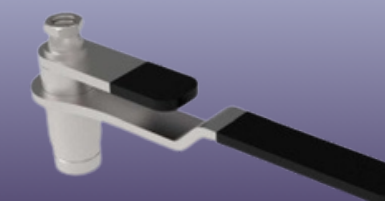

Cerraduras y sensores



MECHATRONIC MANHOLE LOCK

DIMENSIONS
3.15" X 3.15" X 2.36"

BODY MATERIAL
ABS PLASTIC

LOCKING PIN MATERIAL
304 STAINLESS STEEL

RATINGS
IP68
IEC 60068-2 & IEC 600529



PADLOCK

DIMENSIONS
2.6" X 2.9"
BODY MATERIAL
304 STAINLESS STEEL

SHACKLE MATERIAL
304 STAINLESS STEEL
RATINGS
IP67
IEC 600529



SWING HANDLE CABINET LOCK

DIMENSIONS
6.5" X 4.9" X 2.16"

BODY MATERIAL
304 STAINLESS STEEL


DOOR CUT-OUT
4" X 1"
RATINGS
IP67
IEC 600529



FENCE PERIMETER LOCK

ORIENTATION
LH AND RH
BODY MATERIAL
304 STAINLESS STEEL


TEMPER RESISTANCE
FAIL IN SAFE STATE
RATINGS
IP68
IEC 600529

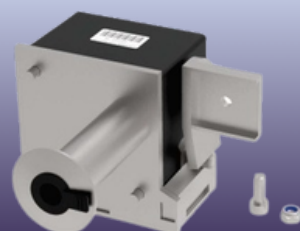

MECHATRONIC DOOR LOCK

DIMENSIONS
3.15" X 3.15" X 2.36"
BODY MATERIAL
304 STAINLESS STEEL


MAX. DOOR THICKNESS
3.15"
RATINGS
IP68
IEC 600529

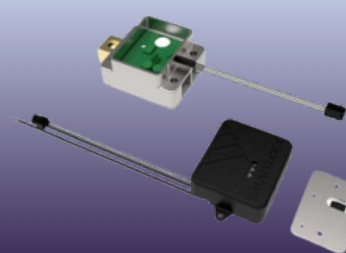

CABINET LOCK (SOFT KEY OPERATED)

BODY MATERIAL
LOCK BODY: ALUMINUM
BT CONTROLLERS: ABS

POWER SOURCE
12V, 24V OR 48V
WEIGHT
2.87LB

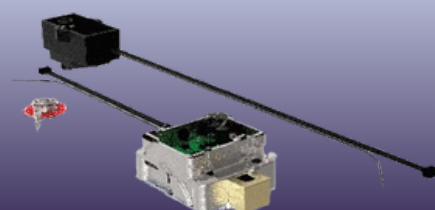

MECHATRONIC SPLIT LOCK

BODY MATERIAL
304 STAINLESS STEEL


POWER SOURCE
PROPIETARY INDUCTIVE CHARGING CIRCUIT
WEIGHT
2.87LB



CONTAINER LOCK

DIMENSIONS
18" X 7.8" X 2.6"
BODY MATERIAL
304 STAINLESS STEEL

WEIGHT
24.25LB
RATINGS
IP67
IEC 600529

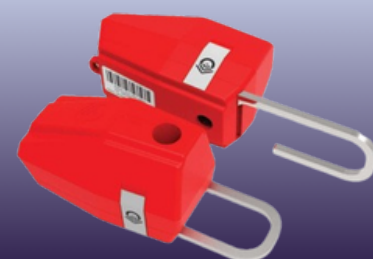

MECHATRONIC SEAL

DIMENSIONS
3.35" X 1.53" X 1.9"
BODY MATERIAL
ABS PLASTIC


SHACKLE MATERIAL
304 STAINLESS STEEL
RATINGS
IP67
IEC 600529



NB-IOT SMART SENSOR

DIMENSIONS
6.6" X 4" X 1.7"
BODY MATERIAL
ABS PLASTIC

SENSORS
LIGHT, TEMPERATURE, IMPACT, HUMIDITY,
ACCELEROMETER
RATINGS
IP68

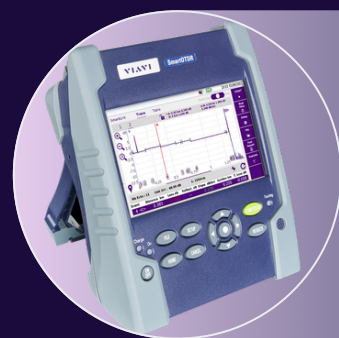

TECNIOUS

SUONCET

www.tecnious.com info@tecnious.com

Cono sur: (+54) 9 113986-1750.

US, Caribe, Centro América: +1 (305) 529-3667.

Av. Alicia Moreau de Justo 1930, Oficina 207, Buenos Aires, Argentina.

2157 NW 79th Ave, Doral, FL 33122 – US.